


## ANTENNAS | OMNI-498 SERIES

# OMNI-DIRECTIONAL, MARINE, 2x2 MIMO WI-FI ANTENNA

Dual-Band Wi-Fi; 2400 – 2500 MHz, 3300 – 4200 MHz, 4900 – 7200 MHz; 9.8 dBi

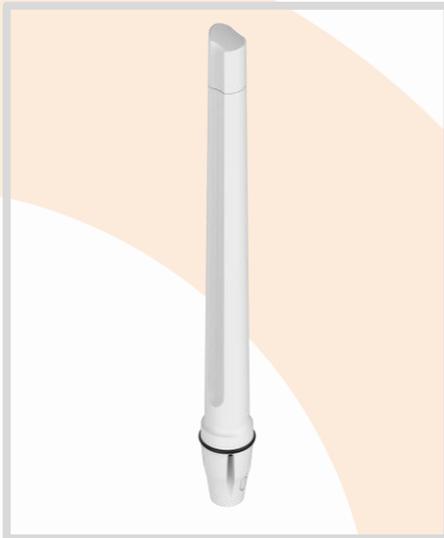

 2400 – 2500 MHz 3300 – 4200 MHz 4900 – 7200 MHz	 2.4 GHz: 7 dBi 5 GHz: 9.8 dBi	 Increase X Mb/s	 Omni- Directional	 WI FI DUALBAND	 (M2M)
 Internet of Things	 -40°C to +80°C	 Salt Spray Protection	 2x2 MIMO	 WI FI 6 802.11ax	 IP 68

- Dual-band Wi-Fi antenna for 2.4 GHz and 4.9 to 7.2 GHz
- 2x2 MIMO capability for improved performance
- Compliant with IEEE 802.11a/b/g/n/ac/ax wireless standards
- UV and saltwater protected for marine and coastal conditions
- Robust and all-weather proof for harsh conditions at sea (IP 68)
- Various 316-stainless steel mounting brackets available



APPLICATION AREAS

## Product Overview

The OMNI-498 is a dual-band Wi-Fi omni-directional antenna for marine & coastal deployments. The antenna provides dual-band Wi-Fi coverage in the 2.4 GHz and 4.9 to 7.2 GHz bands, making it ideal for any Wi-Fi access point, whether it is older Wi-Fi technology or new technology that goes up to Wi-Fi 6E (7.2 GHz). The antenna offers 2x2 MIMO capability from its vertically separated radiating elements, allowing for true omni-directional coverage suitable for marine and coastal applications.

The OMNI-498 is purpose-built for harsh environments with an IP 68 protection rating against dust and water ingress, with the antenna being foam filled, making it ideal for the most severe storms at sea. The radome is fully saltwater protected, so it can be used in highly corrosive environments, thanks to the UV stable ASA radome material.

## Features

- Dual-band Wi-Fi antenna for 2.4 GHz & 4.9 to 7.2 GHz
- 2x2 MIMO capability for improved performance
- High gain omni-directional antenna for Wi-Fi deployments
- Robust and weather-resistant enclosure with an IP 68 rating
- UV and saltwater-protected enclosure for marine applications


## Application Areas

- Marine applications: Yachts / Boats / Ferries
- Increase system transmission reliability
- High-end industrial-grade router applications
- Ports and harbour Wi-Fi & WLAN deployments
- Industrial and commercial Wi-Fi deployment



## Frequency Bands

The OMNI-498 is an omni-directional antenna that works from | 2400 – 2500 MHz | 3300 – 4200 MHz | and | 4900 – 7200 MHz |

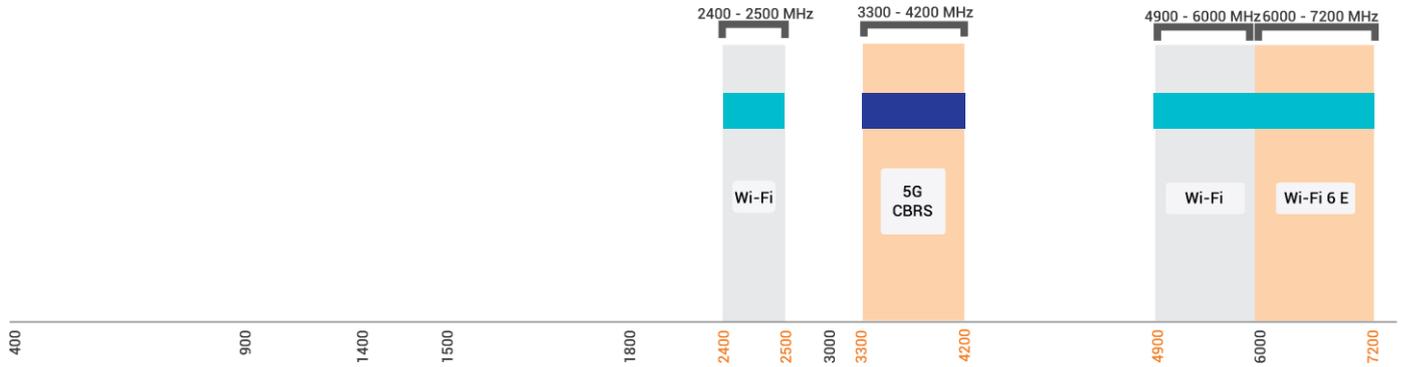

 Indicates the 5G/CBRS bands on which OMNI-498 works

 Indicates the WI-FI bands on which OMNI-498 works

## Antenna Overview

	
<b>Ports</b>	2
<b>SISO / MIMO</b>	MIMO
<b>Polarisation</b>	Linear Vertical
<b>Peak Gain</b>	9.8 dBi
<b>Coax Cable Type</b>	2 x Twin HDF 195
<b>Coax Cable Length</b>	2 m
<b>Connector Type</b>	SMA (M)

\*The coax cable & connector is factory mounted to the antenna

## Electrical Specifications

Frequency Bands:	2400 – 2500 MHz
	3300 – 4200 MHz
	4900 – 7200 MHz
Gain (Max):	7 dBi @ 2400 – 2500 MHz
	8 dBi @ 3300 – 4200 MHz
	9.8 dBi @ 4900 – 7200 MHz
VSWR:	<2:1
Feed Power Handling:	10 W
Input Impedance:	50 Ohm (nominal)
Polarisation:	Linear Vertical
Coax Cable Loss:	0.666 dB/m @ 2400 MHz
	0.788 dB/m @ 3000 MHz
	1.15 dB/m @ 5800 MHz
DC Short:	Yes

## Product Box Contents

Antenna:	A-OMNI-0498-V1-01
Mounting Bracket:	1" (14 TPI) Marine Adapter (BRKT-40) & L-bracket (Ø30-50mm Pole)

## Ordering Information

Commercial Name:	OMNI-498
Order Product Code:	A-OMNI-0498-V1-01
EAN Number:	6009710927465

## Mechanical Specifications

Product Dimensions	750 mm x Ø75 mm (Incl. BRKT-40)
Packaged Dimensions:	705 mm x 150 mm x 100 mm
Weight:	TBC
Packaged Weight:	TBC
Radome Material:	UV Stable Marine ASA
Radome Colour:	Brilliant White
	Pantone P 179-1C
Mounting Type:	Standard 1" -14 TPI marine mount & Wall/pole mount


## Environmental Specifications, Certification & Approvals

Wind Survival:	≤160 km/h
Temperature Range (Operating):	-40°C to +80°C
Environmental Conditions:	Outdoor/Indoor
Water Ingress Protection Ratio/Standard:	IP 68
Salt Spray:	MIL-STD 810G/ASTM B117
Operating Relative Humidity:	Up to 98%
Storage Humidity:	5% to 95% - non-condensing
Storage Temperature:	-40°C to +80°C
Enclosure Flammability Rating:	UL 94-HB
Impact Resistance:	IK 08
Product Safety & Environmental:	Complies with CE and RoHS standards



**Antenna Performance Plots**

**VSWR**

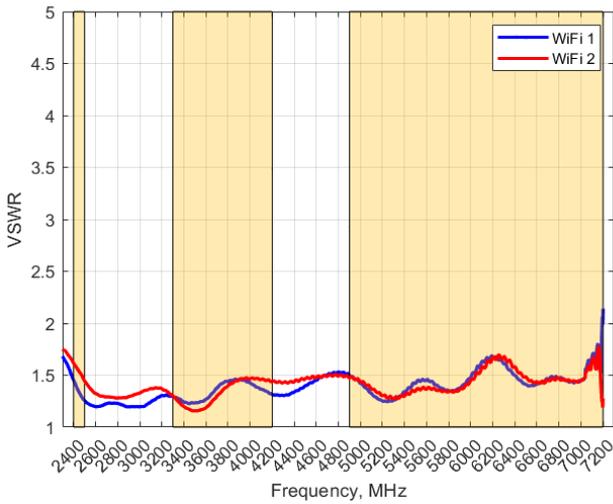


**Voltage Standing Wave Ratio (VSWR)\***

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The OMNI-498 delivers superior performance across all bands with a VSWR of <2:1.

*\*VSWR measured with 2m low loss cable.*

**GAIN (EXCLUDING CABLE LOSS)**

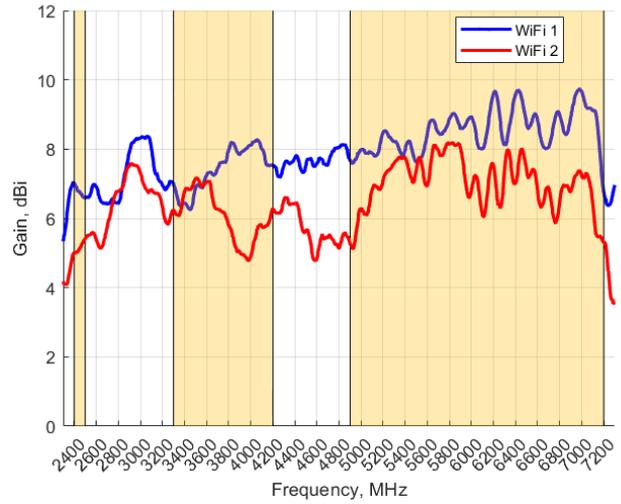


**Gain\* in dBi**

9.8 dBi is the peak gain across all bands

Gain @ 2400 – 2500 MHz:	7 dBi
Gain @ 3300 – 4200 MHz:	8 dBi
Gain @ 4900 – 7200 MHz:	9.8 dBi

*\*Antenna gain measured with polarisation aligned standard antenna*

**Isolation**

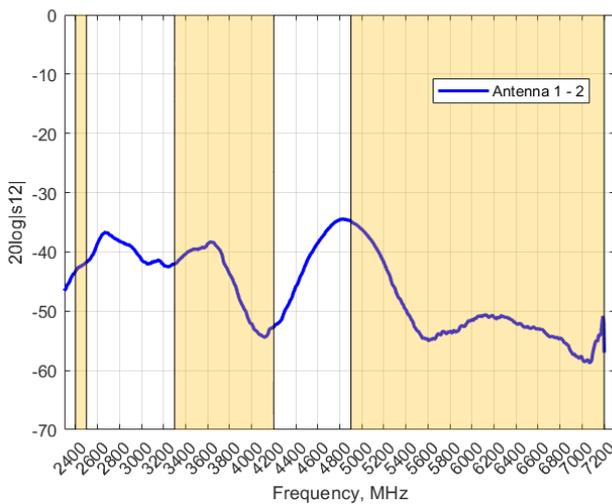


**Isolation**


Isolation is a measurement of the amount of energy leaked from one port to another. A good isolation is under -20 dB.

**MIMO Radiation Patterns**


**Azimuth: 2400 – 2500 MHz**

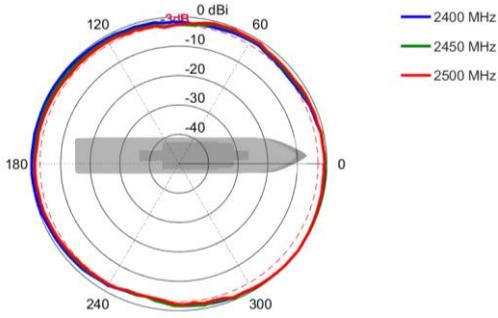


**Elevation: 2400 – 2500 MHz**

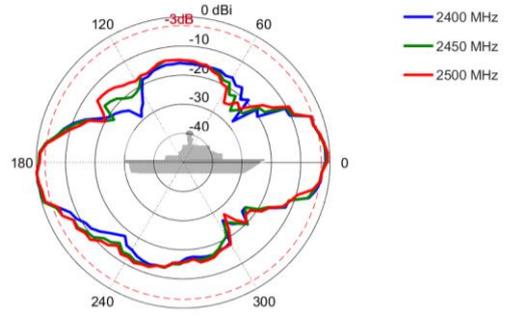


**Azimuth: 3300 – 4200 MHz**

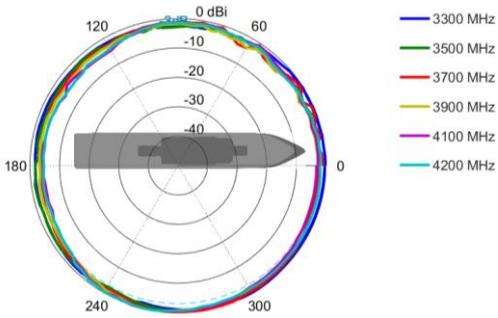


**Elevation: 3300 – 4200 MHz**

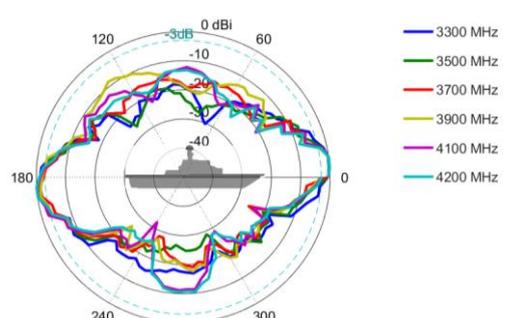


**Azimuth: 4900 – 5900 MHz**

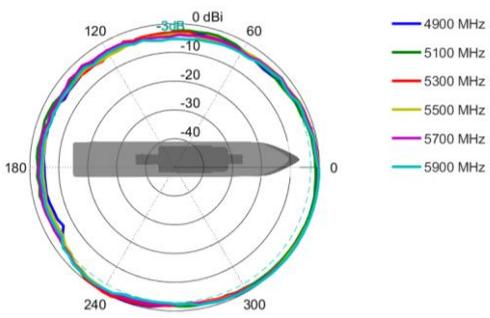


**Elevation: 4900 – 5900 MHz**

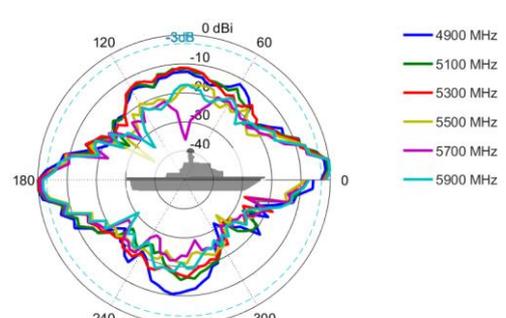



**Azimuth: 6000 – 7200 MHz**

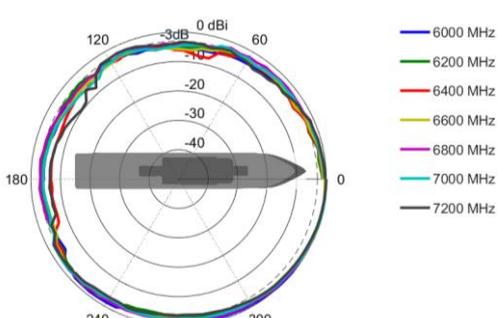


**Elevation: 6000 – 7200 MHz**

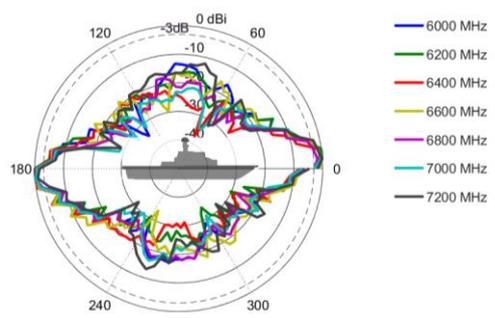

Technical Drawings

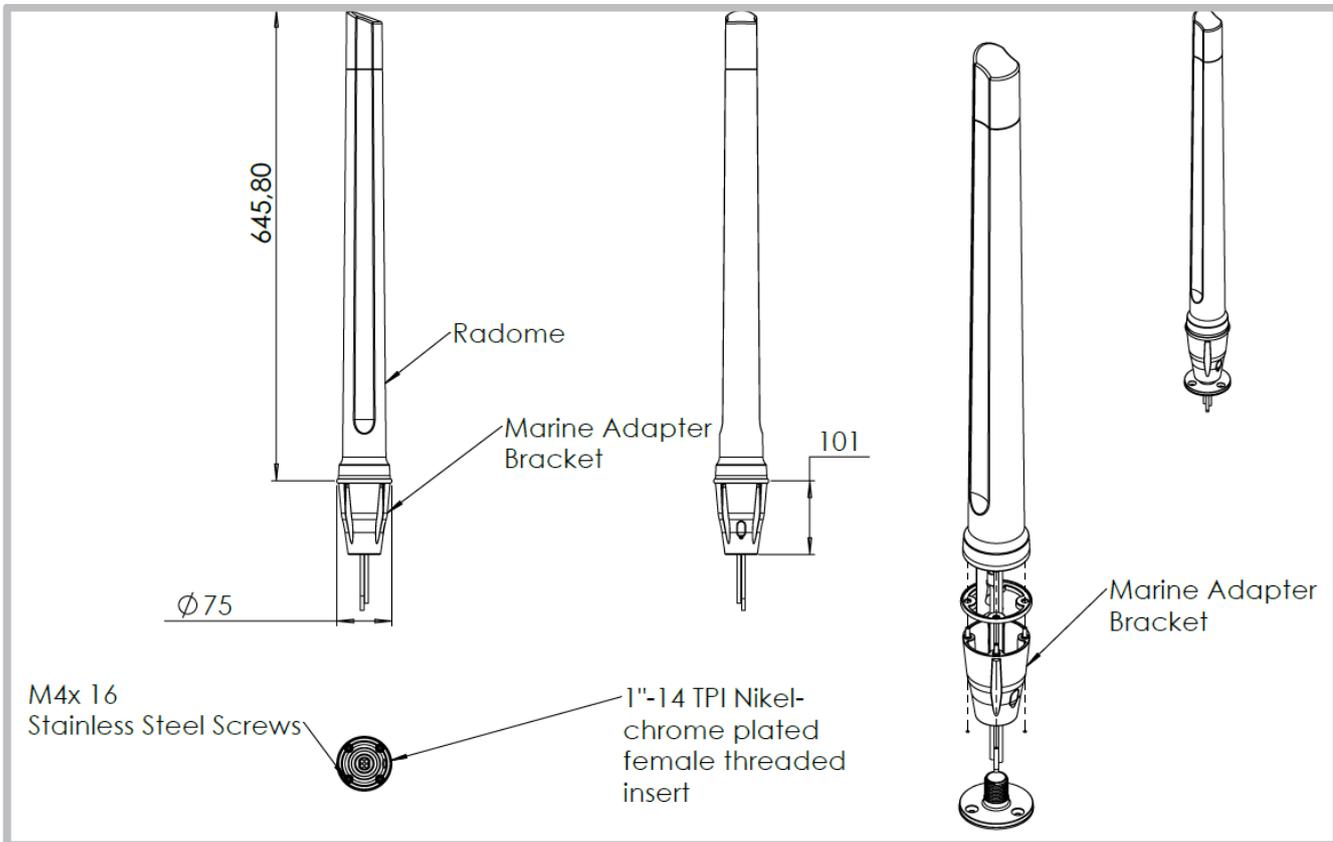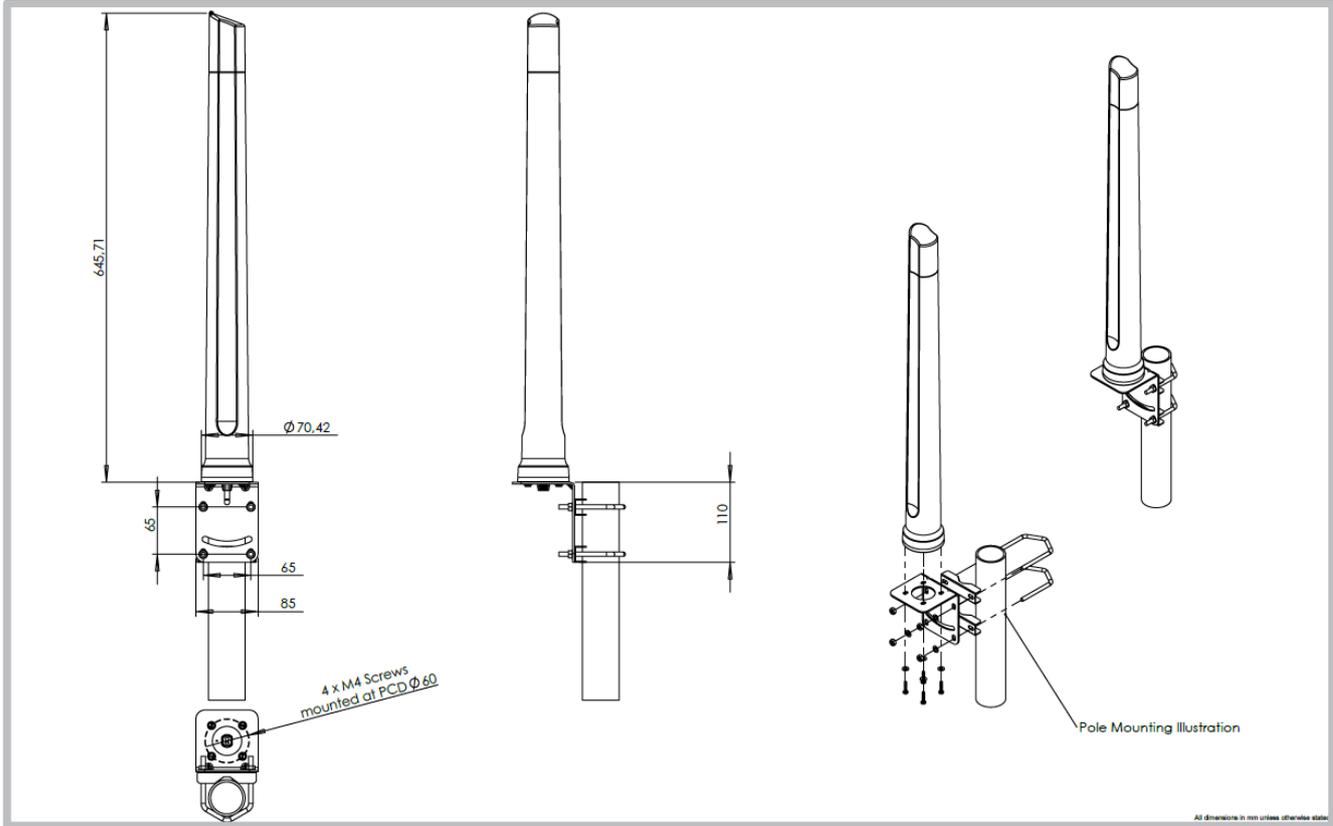


**Mounting Options**

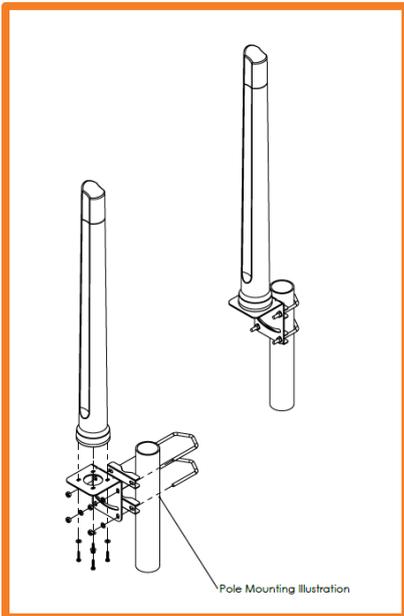

**Pole Mount**

L-Bracket 316 Stainless Steel – included  
(For Ø 30-50mm pole)

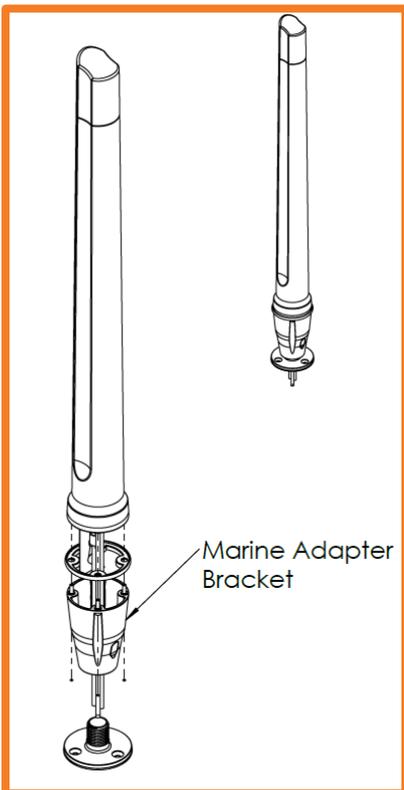

**Marine Bracket Mount**

1" -14 TPI female adapter – included  
Mounts to standard marine brackets:

- BRKT-37: Flat Mount - Optional
- BRKT-38: Ratchet Mount - Optional
- BRKT-39: Rail Mount - Optional

See Optional Accessories below

Also available: BRKT-41 with 1.25" – 11TPI female adapter (Optional)  
See Accessories below

## Additional Accessories

**BRKT-37**

Marine flat mount antenna bracket 1"-14TPI 316 Stainless Steel

**BRKT-38**

Marine ratchet rail mount antenna bracket 1"-14TPI 316 Stainless Steel

**BRKT-39**

Heavy duty marine mount antenna bracket 1"-14TPI 316 Stainless Steel

See accessories technical specifications on [www.poynting.tech](http://www.poynting.tech)

## CONTACT POYNTING

### Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park,  
Landmarks Avenue,  
Samrand, 0157, South Africa

**Phone:** +27 (0) 12 657 0050

**E-mail:** [info@poynting.tech](mailto:info@poynting.tech)

**International Email:** [sales-global@poynting.tech](mailto:sales-global@poynting.tech)

### Poynting Europe

Regus Business Center Neue Messe Riem  
Kronstadter Straße 4  
81677 München  
Germany

**Phone:** +49 89 7453 9002

**E-mail:** [sales-europe@poynting.tech](mailto:sales-europe@poynting.tech)

### Poynting USA

1804 Owen Court, Suite 104,  
Mansfield,  
TX 76063  
USA

**Phone:** +1 817 533-8130

**E-mail:** [sales-us@poynting.tech](mailto:sales-us@poynting.tech)